



TECHFUSE

SEA & LAND ELECTRONIC CORP.

[WWW.SEALAND-PPTC.COM](http://WWW.SEALAND-PPTC.COM)



ALPHA-TOP TECHNOLOGY CORP.

[WWW.ALPHA-TOP.CN](http://WWW.ALPHA-TOP.CN)

## APPROVAL SHEET

MODEL NO.: R60-010

CUSTOMER:

CUSTOMER'S APPROVAL:

AUTHORIZED SIGNATURE/STAMP:

DATE

MANUFACTURER:

HEAD OFFICE:

13F.,No.120-10,Sec.3,Zhongshan Rd.,Zhonghe Dist.,New Taipei City 23544,Taiwan  
Tel: 886-2-8221-2567  
Fax:882-2-2225-7268  
E-mail:service@chipfast.com.tw

China Branch:

Factory Building B)Shuangpeng,Weibu Village, Qiuchang Town,  
Huiyang District, Huizhou City, Guangdong Province, P.R.C.)  
Tel: 86-752-3562001  
Fax:86-752-3558696  
E-mail:service@atptc.com

Submitted by:

Chen

Approved by:

YC Lin

DATE:

16-Mar-22



## R60-010

### Features

- Radial Leaded Devices
- Cured, flame retardant epoxy polymer insulating material meets UL 94V-0 requirements
- Bulk packaging, or tape and reel available on most models

### Applications

- Almost anywhere there is a low voltage power supply, up to 60V and a load to be protected, including:
- Industrial controls
- Automotive electronics
- Medical products

Alpha-Top (Sea & Land Alliance)

### Electrical Properties

Model	V <sub>max</sub> (Vdc)	I <sub>max</sub> (A)	I <sub>hold</sub> (A)	I <sub>trip</sub> (A)	P <sub>d</sub> Typ. (W)	Maximum Time To Trip		Resistance		Agency Approval	
						Current (A)	Time (Sec)	R <sub>min</sub> (Ω)	R <sub>1max</sub> (Ω)	UL	TUV-PS
R60-010	60	40	0.10	0.20	0.38	0.50	4.0	2.00	7.50	✓	✓

**I<sub>hold</sub>** = Hold Current : maximum current device will sustain for 4 hours without tripping in 25°C still air.  
**I<sub>trip</sub>** = Trip Current : minimum current at which the device will trip in 25°C still air.  
**V<sub>max</sub>** = Maximum voltage device can withstand without damage at rated current (I<sub>max</sub>).  
**I<sub>max</sub>** = Maximum fault current device can withstand without damage at rated voltage (V<sub>max</sub>).  
**P<sub>d</sub>** = Power dissipated from device when in the tripped state at 25°C still air.  
**R<sub>i</sub> min/max** = Minimum/Maximum resistance of device in initial (un-soldered) state.  
**R<sub>1 max</sub>** = Maximum resistance of device at 25°C measured one hour after tripping.  
**CAUTION** : Operation beyond the specified ratings may result in damage and possible arcing and flame.

### Environmental Specifications

Test	Conditions
Passive aging	+85°C, 1000 hrs
Humidity aging	+85°C, 85% R.H., 1000 hrs
Thermal shock	+85°C to -40°C, 20 times
Resistance to solvent	MIL-STD-202, Method 215
Vibration	MIL-STD-202, Method 201
Ambient operating /storage conditions : - 40 °C to +85 °C	
Maximum surface temperature of the device in the tripped state is 125 °C	
In case of special use, please contact our engineer	

Agency Approvals :



E201504(Alpha-Top)/E319079(Sea&Land)



R 50274672

Regulation/Standard:



2015/863/EU



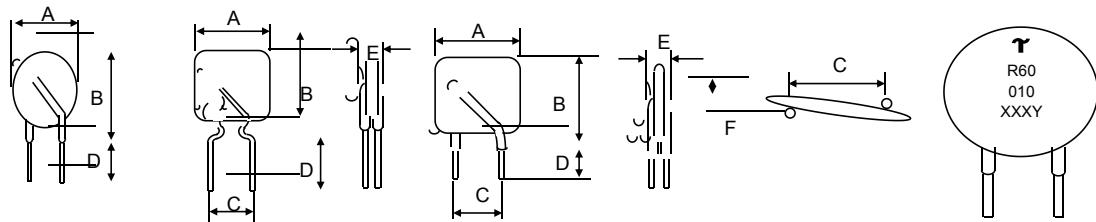
EN14582

### WARNING:

- Use PPTC beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- Use PPTC with a large inductance in circuit will generate a circuit voltage (L di/dt) above the rated voltage of the PPTC.
- Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.

**Physical Dimensions (Unit: mm/inch)**

Model	A Max.	B Max.	C Typ.	D Min.	E Max.	F Max.	Lead Style
R60-010	7.4	12.7	5.1	7.6	3.1	1.0	Kink

**Dimensions**

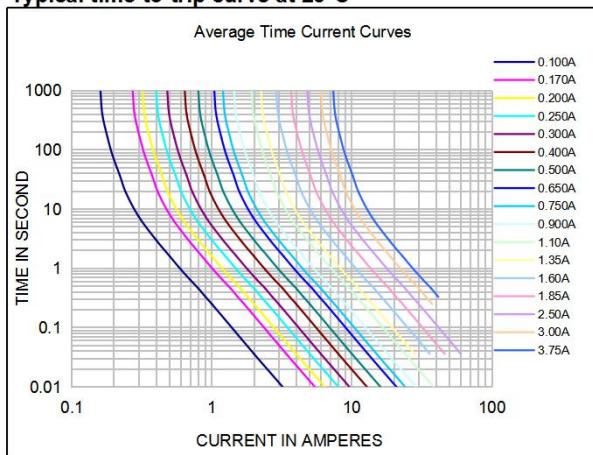
**T** = Trademark  
 R60 = Radial type 60 Vrms  
 010 = 0.10A hold current  
 XXX = Date code  
 Y = Factory code

**Physical Characteristics****Lead Material :**

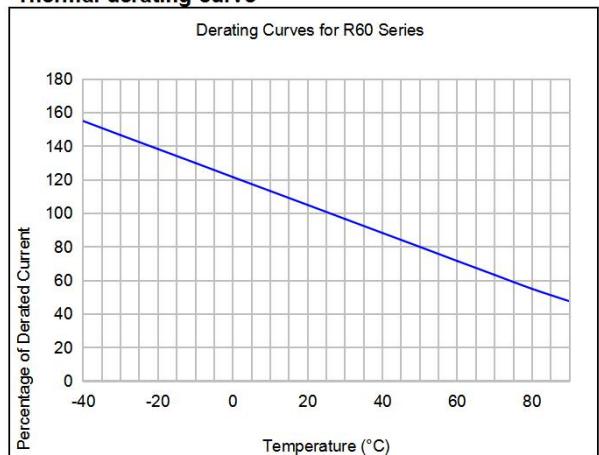
R60-010: Tin-plated copper-clad steel, 0.205mm<sup>2</sup> (24AWG),  $\phi$ 0.51mm(0.020 in).

**Lead Solderability :** MIL-STD-202, Method 208E

## Typical time-to-trip curve at 25°C



## Thermal derating curve

I<sub>hold</sub> versus temperature

Model	Maximum ambient operating temperature (T <sub>mao</sub> ) vs. hold current (I <sub>hold</sub> )								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
R60-010	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.04

## Order information

R60	010	K or S	R or U	Packing	Model	Reel Q'ty	Bag Q'ty
Radial type 60 V	Hold Current 0.10A	K=Kink leads S=Straight leads	R= Tape & Reel U= Bulk packaged		R60-010	3000	500

Tape & Reel packaging per EIA468-B standard.

## Labeling Information

