



SEA & LAND ELECTRONIC CORP.
www.sealand-pptc.com



ALPHA-TOP TECHNOLOGY CORP.
www.alpha-top.cn

APPROVAL SHEET

MODEL NO.:	mSMD010-60V
------------	-------------

CUSTOMER:

CUSTOMER'S APPROVAL:

AUTHORIZED SIGNATURE/STAMP:

DATE

MANUFACTURER:

HEAD OFFICE:

13F.,No.120-10,Sec.3,Zhongshan Rd.,Zhonghe Dist.,New Taipei City 23544,Taiwan
Tel: 886-2-8221-2567
Fax:882-2-2225-7268
E-mail:service@chipfast.com.tw

China Branch:

Factory Building B)Shuangpeng,Weibu Village, Qiuchang Town,
Huiyang District, Huizhou City, Guangdong Province, P.R.C.)
Tel: 86-752-3562001
Fax:86-752-3558696
E-mail:service@atptc.com

Submitted by:	Chen
Approved by:	YC Lin
DATE:	1-Mar-25

SEA & LAND ELECTRONIC CORP.



mSMD010-60V

Features

- Surface Mount Devices
- Lead free device
- Size 4.5*3.2 mm/0.18*0.12 inch
- Surface Mount packaging for automated assembly

Applications

- Almost anywhere there is a low voltage power supply, up to 60V and a load to be protected, including:
- Computer mother board, Modem, USB hub
- PDAs & Charger, Analog & digital line card
- Digital cameras, Disk drivers, CD-ROMs,

Alpha-Top (Sea & Land Alliance)

Performance Specification

Model	V _{max} (Vdc)	I _{max} (A)	I _{hold} @25°C (A)	I _{trip} @25°C (A)	P _d Typ. (W)	Maximum Time To Trip		Resistance		Agency Approval UL	TUV
						Current (A)	Time (Sec)	R _i _{min} (Ω)	R ₁ _{max} (Ω)		
mSMD010-60V	60	100	0.10	0.30	0.8	0.5	1.50	0.750	15.000	✓	✓

I_{hold} = Hold Current. Maximum current device will not trip in 25°C still air.

I_{trip} = Trip Current. Minimum current at which the device will always trip in 25°C still air.

V_{max} = Maximum operating voltage device can withstand without damage at rated current (I_{max}).

I_{max} = Maximum fault current device can withstand without damage at rated voltage (V_{max}).

P_d = Power dissipation when device is in the tripped state in 25°C still air environment at rated voltage.

R_i_{min/max} = Minimum/Maximum device resistance prior to tripping at 25°C.

R₁_{max} = Maximum device resistance is measured one hour post reflow.

CAUTION : Operation beyond the specified ratings may result in damage and possible arcing and flame.

Environmental Specifications

Test	Conditions
Passive aging	+85°C, 1000 hrs.
Humidity aging	+85°C, 85% R.H. , 168 hours
Thermal shock	+85°C to -40°C, 20 times
Resistance to solvent	MIL-STD-202,Method 215
Vibration	MIL-STD-202,Method 201
Ambient operating conditions : - 40 °C to +85 °C	
Maximum surface temperature of the device in the tripped state is 125 °C	
In case of special use,please contact our engineer	

Agency Approvals :



E201504(Alpha-Top)/E319079(Sea&Land)



R 50481056

Regulation/Standard:



2015/863/EU



EN14582

I_{hold} Versus Temperature

Model	Maximum ambient operating temperature (T _{mao}) vs. hold current (I _{hold})								
	-40°C	-20°C	0°C	25°C	40°C	50°C	60°C	70°C	85°C
mSMD010-60V	0.16	0.14	0.12	0.10	0.08	0.07	0.06	0.05	0.03




mSMD010-60V

Alpha-Top (Sea & Land Alliance)


Construction And Dimension (Unit:mm)

Model	A Min.	A Max.	B Min.	B Max.	C Min.	C Max.	D Min.	E Min.
mSMD010-60V	4.37	4.73	3.07	3.41	0.50	1.00	0.30	0.25

Dimensions & Marking

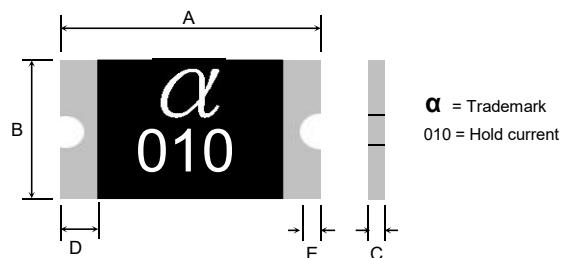

Recommended Pad Layout (mm)

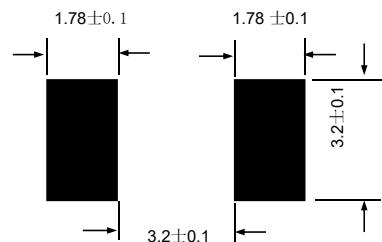

Termination Pad Characteristics

Terminal pad materials:

Tin-plated Nickel-Copper


Terminal pad solderability:

Meets EIA specification RS186-9E and ANSI/J-STD-002 Category 3.


Rework

Use standard industry practices, the removal device must be replaced with a fresh one.

Thermal Derating Curve

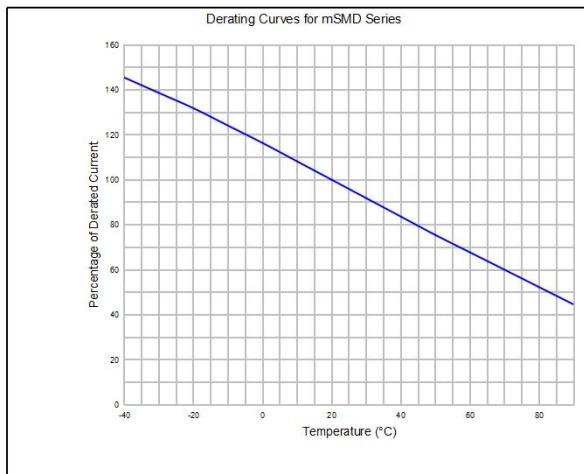

Typical Time-To-Trip At 25°C

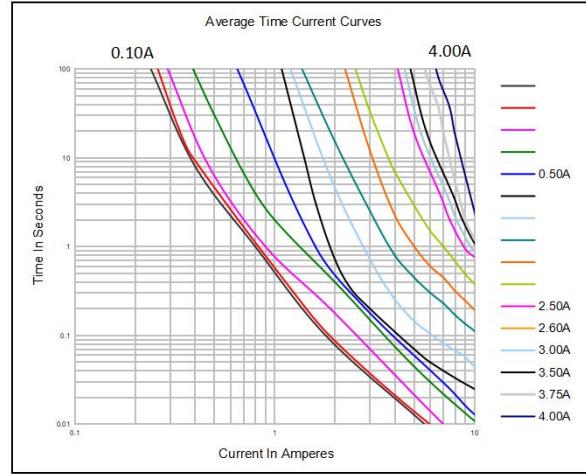

WARNING:


- Use PPTC beyond the maximum ratings or improper use may result in device damage and possible electrical arcing and flame.
- PPTC are intended for protection against occasional over current or over temperature fault conditions and should not be used when repeated fault conditions or prolonged trip events are anticipated.
- Device performance can be impacted negatively if devices are handled in a manner inconsistent with recommended electronic, thermal, and mechanical procedures for electronic components.
- Use PPTC with a large inductance in circuit will generate a circuit voltage ($L \frac{di}{dt}$) above the rated voltage of the PPTC.
- Avoid impact PPTC device its thermal expansion like placed under pressure or installed in limited space.
- Contamination of the PPTC material with certain silicon based oils or some aggressive solvents can adversely impact the performance of the devices. PPTC SMD can be cleaned by standard methods.
- Requests that customers comply with our recommended solder pad layouts and recommended reflow profile. Improper board layouts or reflow profile could negatively impact solderability

α₃₇₅ α₃₀₀ α₁₁₀ α₀₃₀ α₀₁₀

mSMD010-60V

Alpha-Top (Sea & Land Alliance)

Recommended Solder Reflow Conditions

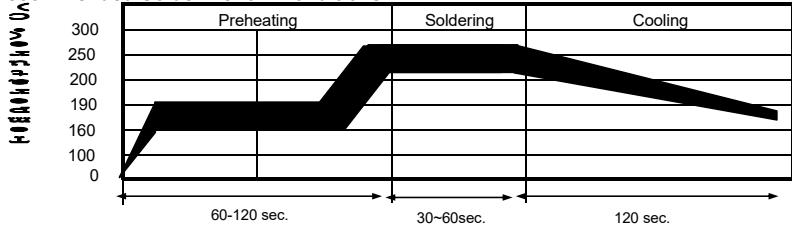

· Recommended reflow methods: IR, vapor phase oven, hot air oven.
· Devices are not designed to be wave soldered to the bottom side of the board.


· Recommended maximum paste thickness is 0.25 mm (0.010 inch).
· Devices can be cleaned using standard method and solvents.

Note: If reflow temperatures exceed the recommended profile, devices may not meet the performance requirements.


Tape And Reel Specifications (mm)

Governing Specifications	EIA 481-1
W	12 ± 0.3
P0	4.0 ± 0.10
P1	8.0 ± 0.10
P2	2.0 ± 0.05
A0	3.5 ± 0.23
B0	5.1 ± 0.15
B1max.	5.9
D0	1.5 + 0.1, -0
F	5.5 ± 0.05
E1	1.75 ± 0.10
E2min.	10.25
Tmax.	0.6
T1max.	0.1
K0	0.9 ± 0.15
Leader min.	390
Trailer min.	160
Reel Dimensions	
A max.	178
N min.	60
W1	12.4 + 2.0, -0.0
W2max.	18.4

EIA Tape Component Dimensions

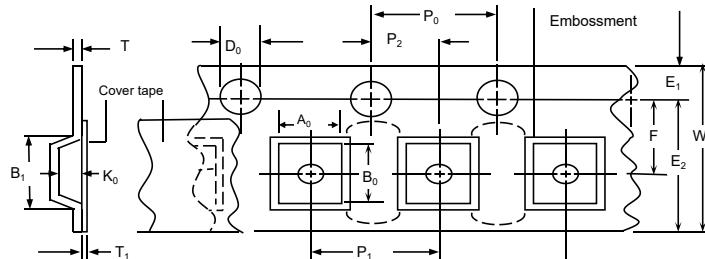

EIA Reel Dimensions

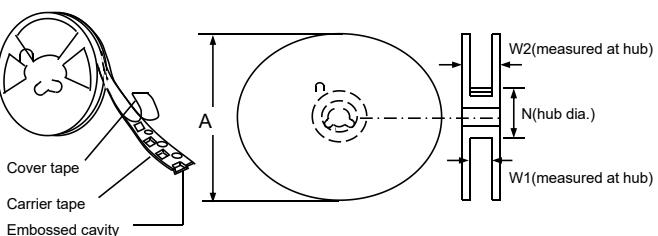

Storage And Handling

- Storage conditions: 40°C max, 70% R.H.
- Devices may not meet specified performance if storage conditions are exceeded.

Order Information

mSMD	010-60V	Packaging	Tape & Reel Quantity
Product name Size 4532mm/1812 inch SMD: surface mount device	Hold Current 0.10A		1,500 pcs/reel

Tape & reel packaging per EIA481-1

Labeling Information

